



Molded for Success


**SMART HOT MELT POLYAMIDES FOR
LOW PRESSURE MOLDING**



LOW PRESSURE MOLDING

Used to encapsulate electronic components, Low Pressure Molding (LPM) technology serves an important role in protecting and sealing items against moisture, dust, dirt and debris.

Simplified to a single, fast process, LPM is a cross between classic plastic injection and resin potting and is ideal for connectors, onboard electronics, LEDs and PCBs (printed circuit boards).

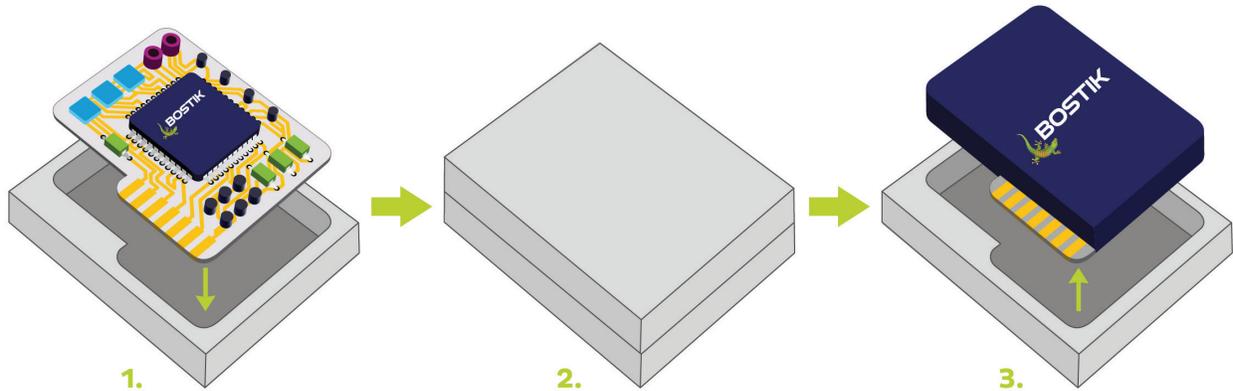

Encapsulate electronic parts in a single, fast process.

EXPERIENCED GLOBAL SOLUTION PARTNER

A pioneer in the development of LPM technology, Bostik's extensive expertise enables us to understand customers' unique performance and process requirements.

WORLD LEADER IN SMART ADHESIVES...

An Arkema company, Bostik formulates industrial adhesives at a global scale. Designed to improve operational efficiencies and aid in sustainability efforts, these adhesives also enhance product functionality and durability overall.

With a global R&D network comprised of three international Smart Technology Centers and 11 regional centers, we ensure fully integrated production and centralized competencies. Additionally, our knowledgeable technical support team enables us to work closely with customers, meeting their existing needs while anticipating future needs to come.

...AND IN SMART LOW PRESSURE MOLDING

As a proven solution provider, Bostik has developed partnerships with equipment manufacturers and low pressure injection experts. These partnerships, in addition to our technical know-how of the LPM process, have enabled our company to offer the best solution for each and every encapsulation project.

Specifically, our LPM solutions include Thermelt, a comprehensive range of hot melt polyamide adhesives designed to meet customers' unique needs. Multipurpose with high resistance to temperature and oil, these adhesives offer easy processability at low pressure and low temperatures, which enables them to encapsulate even fragile, sensitive electronics for the most demanding environments.


Other formulations offer more cohesion and higher thermal stability for certain applications.



TYPICAL APPLICATIONS



Captors and Sensors

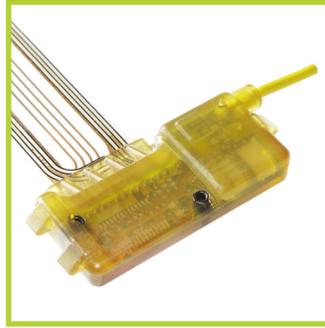

PCB Overmolding



Connectors and Cables



Antennas

KEY APPLICATION MARKETS

LPM applications are used in various key markets, such as automotive, electronics, smart phones, medical and other industrial areas.



BENEFITS OF SMART LOW PRESSURE MOLDING



Process

SMALL PROCESS FOOTPRINT

Lower energy consumption due to low injection pressure and need for less equipment.

HIGH PRODUCTION SPEEDS

Reduced cycled times with one-component product; immediate set with no mixing errors.

EASIER MANUFACTURING

Simplified process with only three steps.



Product

HARMLESS ENCAPSULATION

Suitable for the most sensitive electronic components.

HIGH RESISTANCE

Water-tight, UL94 V0 approved, resistant to high temperatures, shocks, harsh environments and solvents.

QUALITY DESIGN

Lightweight, sky-lining and aesthetically-pleasing design; no housing needed.



Sustainability

ZERO WASTE

Recyclable excess material and long shelf life

NATURAL MATERIAL

Solvent-free, bio-based up to 90%.

RECYCLABILITY

Improved end-of-life management.

HOT MELT POLYAMIDES

The Thermelt polyamide hot melts range includes multipurpose products with easy processability and high resistance in harsh environments, and most are available in black and natural colors. Bostik helps you find a sustainable and safe solution for your most complex LPM projects.

Product	Operating Range (°C)	Shore Hardness (ISO 868) (Instant/15s)	Softening Point (°C) (ASTM D3461)	Typical Characteristics
Thermelt 861	-40°C to 125°C	40/21 D	160°C ±5°C	General purpose moldable polyamide with good adhesion for industrial applications.
Thermelt 867	-40°C to 150°C	38/27 D	183°C ±5°C	General purpose high performance moldable polyamide with good adhesion and environmental and thermal shock resistance. Used for applications such as automotive exteriors.
Thermelt 866	-25°C to 115°C	22/12 D	155°C ±5°C	Moldable polyamide with excellent adhesion to PES, PC and other demanding substrates.
Thermelt 817R	-15°C to 125°C	43/28 D	165°C ± 5°C	Specialty moldable polyamide with very low application viscosity for demanding designs.
Thermelt 868	-40°C to 125°C	30/20 D	160°C ±5°C	Moldable polyamide with very good UV and moisture resistance. Used for demanding outdoor applications. Clearest color of the range.
Thermelt 858	-40°C to 150°C	40/32 D	180°C ±5°C	Moldable polyamide with very good thermal stability as well as UV and moisture resistance. Available in black only.
Thermelt 865	-55°C to 120°C	30/16 D	157°C ±5°C	Moldable polyamide with very good low temperature resistance and good adhesion for automotive applications.
Thermelt 892	-20°C to 140°C	45/36 D	175°C ±5°C	Moldable polyamide with increased strength and hardness for industrial and consumer electronics applications. Available in black only.
Thermelt 195	-20°C to 150°C	45/40 D	200°C ±5°C	Moldable polyamide with excellent thermal stability and increased hardness for electronics overmolding.
Thermelt 861 HV	-30°C to 125°C	32/20 D	160°C ±5°C	General purpose high-end moldable polyamide with good adhesion and improved internal cohesion for industrial applications. Available in black only.
Thermelt 867 HV	-50°C to 150°C	45/29 D	182°C ±5°C	General purpose, high-end moldable polyamide with good adhesion, very good mechanical properties and improved internal cohesion for demanding industrial applications. Available in black only.

LPM POLYAMIDE HOT MELTS PRODUCTS

General Purpose

High Hardness and Toughness

Application

Very Low Viscosity

TH817R

Increased Hardness

TH892

Thermal Stability

TH195

Adhesion to Difficult Substrates

Application

Very Good Adhesion

TH866

Good Adhesion

Mechanical Performance

Good

TH861

Very Good

TH867

TH861HV

TH867HV

Improved cohesive and mechanical properties

Resistance to Harsh Environments

Application

Cold Resistance

TH865

UV & Outdoor Resistance

TH868

TH858



* Please get in touch with your Bostik representative to know which product is available in your territory.



BOSTIK



SCAN HERE FOR
MORE INFORMATION



IMPORTANT – PLEASE READ BEFORE USING THIS BROCHURE TERMS & CONDITIONS

Bostik offers this Brochure for descriptive and informational use only. The Brochure is not a contract and is not a substitute for expert or professional advice.

The statements, technical information, data, and recommendations contained herein are not exhaustive, are believed to be accurate as of the date hereof, and are not warranted in any way. The Brochure relies upon your knowledge and input, and as such, its results are based solely upon the information you provide and the choices that you make. Since the conditions and methods of use of the products and the information referred to herein are beyond our control, Bostik expressly disclaims any and all liability and damages that may arise from any use of the Brochure, the products, the results therefrom, or reliance on the information contained herein, and you hereby agree to waive any and all claims against Bostik relating in anyway thereto.

The Brochure is one of several tools that may be used to help you find the product best suited for your needs. It is used at your own risk, and by using it, you are knowingly accepting and assuming any and all risks associated with its use, recommendations, output and your selections. You are responsible to test the suitability of any product in advance for any intended use. Bostik does not guarantee the reliability, completeness, use,

or function of the Brochure or any recommendations arising therefrom. The data

and information are provided 'AS IS'.

The information provided herein relates only to the specific products designated and may not be applicable when such products are used in combination with other materials or in any process. **Bostik encourages you to read and understand the Technical Data Sheet and the Safety Data Sheet for all products**, which are located on our corporate website.

NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE OR WARRANTY OF MERCHANTABILITY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE PRODUCTS DESCRIBED OR THE INFORMATION PROVIDED HEREIN, AND SUCH WARRANTIES ARE HEREBY DISCLAIMED. Bostik disclaims any liability for direct, incidental, consequential, or special damages to the maximum extent allowed by law. Nothing contained herein constitutes a license to practice under any patent, and it should not be construed as an inducement to infringe any patent. You are advised to take appropriate steps to be sure that any proposed use of the products will not result in patent infringement.

By using this Brochure, you are hereby consenting to the above terms and conditions of use, and you agree to waive certain rights as set forth above.

04.13.22

©2022 Bostik. All rights reserved.

Adhesive solutions by **ARKEMA**